




BINDING & BOARD SETUP TIPS

Your new bindings work best on a dialed-in board setup

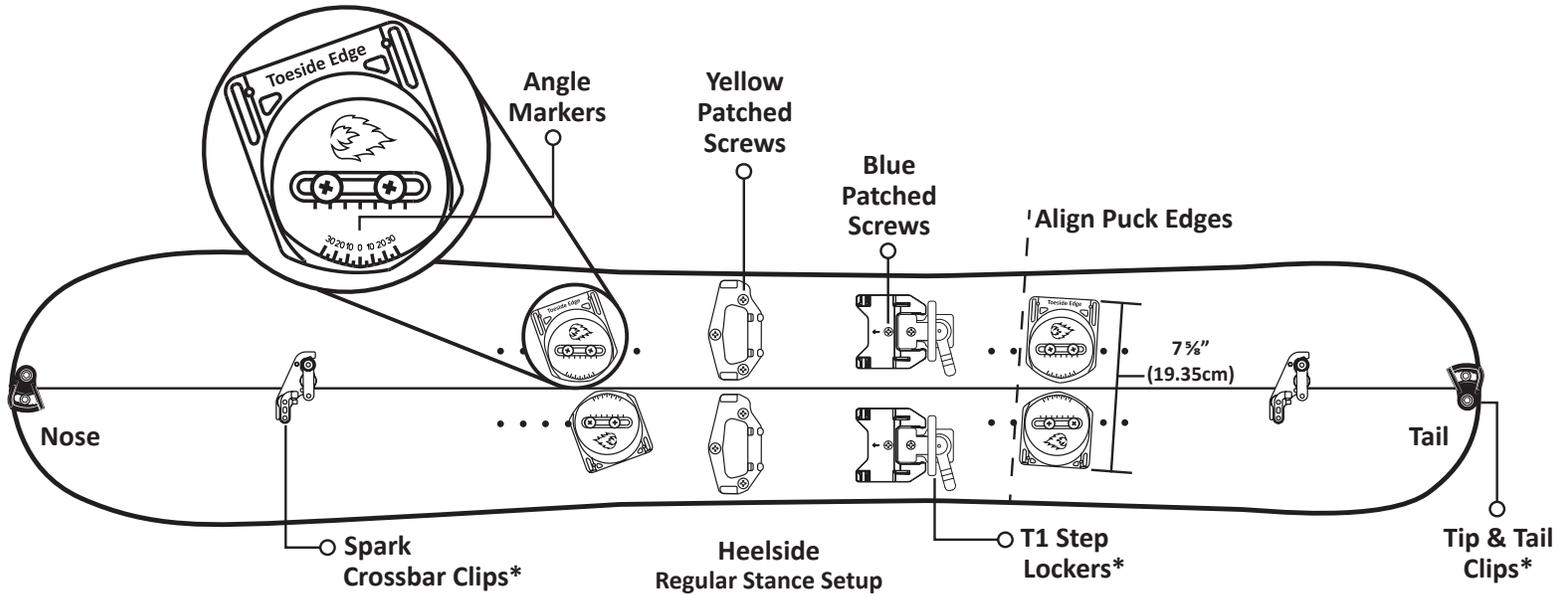

CHECK YOUR BOARD SETUP

Puck Setup:

- For Spark Puck setup please see the instructions included with your packaged pucks or find the installation guide on our website: sparkrandd.com/gear/spark-pucks
Setup is slightly different for Spark Canted Pucks: sparkrandd.com/gear/canted-pucks
- For other puck brands please refer to the manufacturer's website for setup instructions.

Puck Troubleshooting:

- The outside length from puck to puck should be 7 7/8" (19.35cm).
- The bindings should slide on easily. If it feels like they are jamming, check your puck alignment and make adjustments as necessary.
- If your pucks are brand new, the fit might feel tight but will break in after just a couple of times changing over.
- If still too tight, sand lightly on the top and sides of the pucks with the included sandpaper. Check fit while pucks are wet.
- With the bindings on the pucks in ride mode, you should be able to easily snap down the toe ramp. If you can't, loosen the screws and nudge the toeside puck in slightly.

Touring Brackets:

- Attach the touring brackets with the yellow patched screws.

Heel Rests:

- Orient the heel rests so that the arrow points toward the nose of the board. Attach heel rests with the blue patched screws.
- If you have a DIY splitboard using ski screws, you will need to use 5.5 x 11.5mm ski screws for the heel rests. Longer screws that are typically used for DIY setups are too long and will bubble your base.

OUR BINDINGS ARE FULLY ADJUSTABLE!

If the fit is not perfect out of the box, use the included Spark pocket tool to adjust the heel cup position, toe and ankle strap lengths, and highback rotation. Then throw the tool in your pack so it's always with you when you're out in the backcountry.

Check to see that your screws are tight from time to time for uninterrupted shredding.

*Other Spark R&D Products:

Spark Crossbar Clips

Features a one piece crossbar that extends from one set of bolts to the other. The cam lever clamps the board together, taking gaps out of the board seam, and rotates out of the way for touring.

Tip & Tail Clips

Our tip and tail clips offer a custom fit to match the variability in any board. With five progressively tighter notches you can get your board as tight as you want.

T1 Step Lockers

Allows splitboarders to lock down their heel in tour mode to better adapt to diverse split-skiing terrain. Lockers attach to the heel rest. Rotate the lever and step in to lock. Rotate lever back to release.